

Quick Start Guide for FreeStyle Libre 2 Reader



### **Setup Overview**

Refer to your User's Manual for full System instructions and information.



Assemble and Apply Sensor to your body



2 Start new Sensor with Reader

Wait 60 minutes for start-up

Check your glucose whenever you want for up to 14 days.



## Assemble and Apply Sensor to the back of your upper arm

#### STEP 1



Select site on <u>back of upper arm</u>. Do not use other sites as these may result in inaccurate glucose readings. **Note:** Avoid scars, moles, stretch marks, lumps, and insulin injection sites. To prevent skin irritation,

#### STEP 2



Wash site using a plain soap, dry, and then clean with alcohol wipe. Allow site to air dry before proceeding.

#### STEP 3





Peel lid completely off Sensor Pack. Unscrew cap from Sensor Applicator.

**CAUTION:** Sensor codes must match on Sensor Pack and Sensor Applicator or glucose readings will be incorrect.



#### STEP 4

rotate sites between applications.



Line up dark mark on Sensor Applicator with dark mark on Sensor Pack. On a hard surface, press down firmly on Sensor Applicator until it comes to a stop.

#### STEP 5



Lift Sensor Applicator out of Sensor Pack.

### STEP 6



Sensor Applicator is ready to apply Sensor.

**CAUTION:** Sensor Applicator now contains a needle. Do not touch inside Sensor Applicator or put it back into Sensor Pack.


### STEP 7



Place Sensor Applicator over site and push down firmly to apply Sensor.

**CAUTION:** Do not push down on Sensor Applicator until placed over prepared site to prevent unintended results or injury.

#### STEP 8



Gently pull Sensor Applicator away from your body.

### STEP 9



Make sure Sensor is secure. Discard used Sensor Applicator and Sensor Pack according to local regulations.



#### STEP 1



Press Home Button to turn on Reader.

**Note:** If using Reader for the first time, follow the prompts to set date and time.

#### STEP 2



Touch Start New Sensor. Hold Reader within 1.5 inches (4 cm) of Sensor to scan it.

**Note:** Before you start your Sensor, choose which device you want to use. If you start the Sensor with the Reader, you will be unable to use the App to check your glucose or receive alarms.

#### STEP 3





What it means

Glucose rising

Glucose falling

Glucose rising quickly

Glucose changing slowly

Glucose falling quickly

Review the important information on the screen.

Sensor can be used to check your glucose after 60 minutes.

# **Check your glucose**

#### STEP 1




Press Home Button to turn on Reader.

#### STEP 2



Hold Reader within 1.5 inches (4 cm) of Sensor to scan it.

### STEP 3

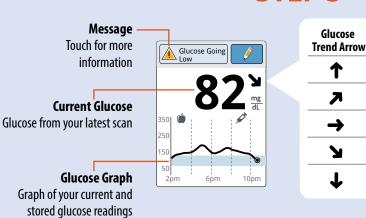

Reader shows your glucose reading. This includes your Current Glucose, Glucose Trend Arrow, and Glucose Graph.

### **Setting Alarms**

The Sensor automatically communicates with the Reader and can give you glucose alarms. Alarms are on by default. To change their settings or turn alarms off, follow these steps.

**IMPORTANT:** Glucose alarms are an important safety feature. Please consult your health care professional before making changes.

#### STEP 1



Press Home Button to go to 





Touch **Alarms** and then touch **Change Alarm Settings.** 

### STEP 3

Notifies you when glucose is below the level you set.

Settings Low Glucose Alarm High Glucose Alarm Signal Loss Alarm

Change Alarm

Notifies you when Sensor is not communicating with Reader and that you are not getting Low or High Glucose Alarms.

Select and set your alarms. Touch **done** to save.

### **Using Alarms**

You must scan your Sensor to see your glucose reading.





Touch Dismiss Alarm & Check **Glucose** or press the Home Button to dismiss alarm and check your glucose.



Touch No to dismiss alarm.

Touch **Yes** or press the Home Button to dismiss alarm and scan the Sensor.



Notifies you when glucose is

above the level you set.

When any alarm is on, sound/vibration and signal status display on the Home Screen.

Symbol	What it means
<b>■</b> )}	Sound and Vibration <b>ON</b>
₹)}	Sound and Vibration <b>OFF</b>
((•))	Sensor communicating with Reader
(M)	Sensor not communicating with Reader

Refer to User's Manual for additional symbols.

